


L-Section Filters

5000 / 5100 / 5200

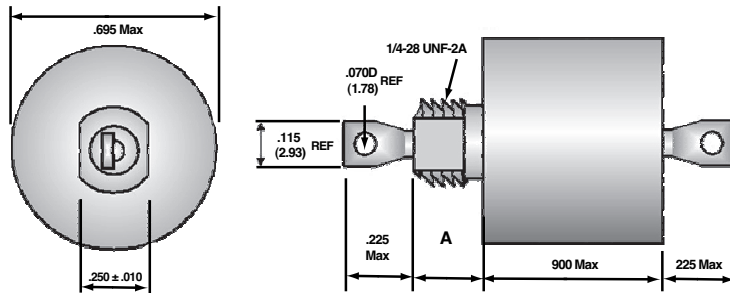

Schematic *

* For a reverse configuration with the inductive element opposite the thread end, add an "R" suffix to the part number; i.e., 5200-010R

Part No		Min Cap μf	Working Voltage	Minimum Insertion Loss (dB)						Max DCR (ohms)	Rated DC Current	
A = .187	A = .312			30 kHz	150 kHz	300 kHz	1 MHz	10 MHz	1 GHz			
Series 5200-XXX												
5200-010	5200-020	—	200 VDC	14	42	54	70	70	70	10	.10	
5200-011	5200-021	—		6	32	44	65	70	70	4	.25	
5200-012	5200-022	—		—	23	35	56	70	70	1	.50	
5200-013	5200-023	—		—	10	21	41	70	70	.25	1.0	
5200-014	5200-024	—		—	8	14	30	70	70	.063	2.0	
5200-015	5200-025	—		—	8	14	26	64	70	.027	3.0	
5200-016	5200-026	—		—	—	8	14	25	45	70	.003	10.0

Drawings may not be to scale; refer to dimensions.