

COAXIAL TERMINATIONS CONDUCTION COOLED K CONNECTOR (2.92mm)




General Specifications

Impedance: 50 Ohms
 Temperature Range: -55°C to +150°C
 Housing: Passivated Stainless Steel (IAW ASTM-A484 & ASTM-A582, Alloy 303, Cond. A)
 Conductor: Gold Plated IAW MIL-PRF-39012 +100°C.
 Temperature Range: -55°C to +150°C
 Housing: Black Anodized where applicable.



Part Number	Frequency (GHz)	VSWR (max)	Power (W)
RCX8KM2	DC-40.0	1.25:1	2

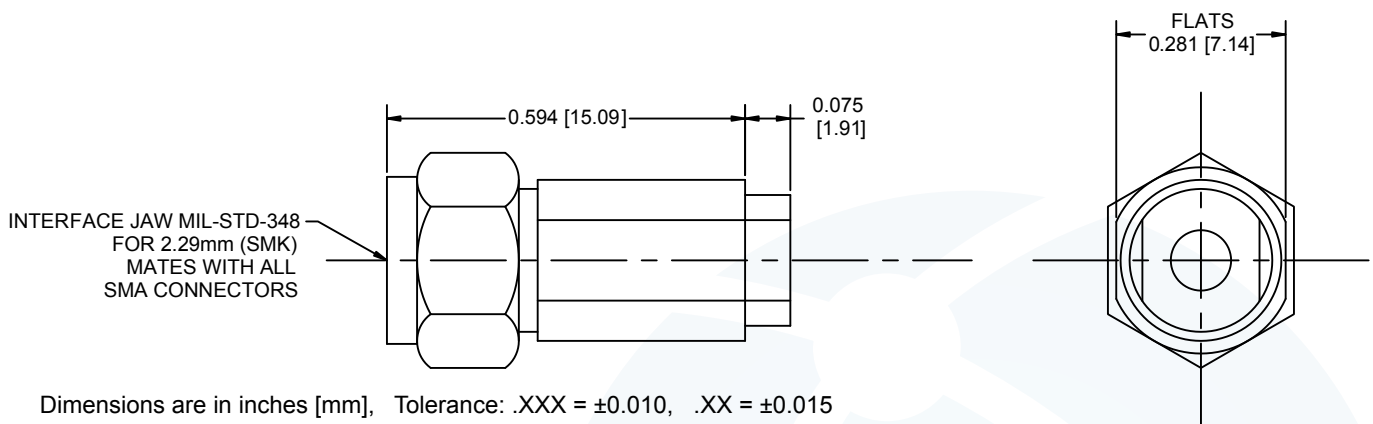

Ordering Information:

Example: **RCX 8 K M 2**

Series ———— ↑
 Frequency: ———— ↑
 8: DC-40 GHz (VSWR: 1.25:1)
 Connector Type: ———— ↑
 K: 2.92mm
 Gender ———— ↑
 M: Male
 Power (W) ———— ↑

