

General Specifications


Housing: Nickel Plated Aluminum or Copper

Resistive Material: Thick Film

Connectors: SMA, Type N or TNC



Part Number	Impedance	Attenuation Accuracy (dB)	Frequency GHz	VSWR (max)	Temperature Range	Power (W)
RPAX25-XXXdB	50 Ohms	±0.3	DC-2.0	1.15:1	-55° to +150°C	25

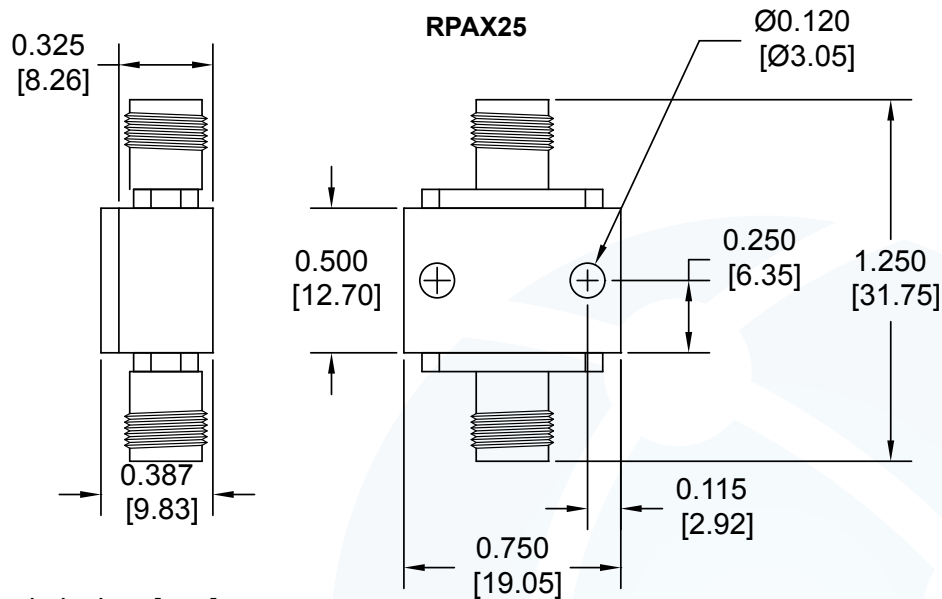

Dimensions are in inches [mm],
Tolerance: .XXX = ±0.010, .XX = ±0.015

Ordering Information:

Example: **RPAX 25 -S MF dB**

Series ——— RPAX
Power Rating (W) ——— 25
Connector Type ——— -S
Gender ——— MF
dB Value ——— dB
(See Tables For Available Values)

S: SMA
N: N-Type
T: TNC
M: Male
F: Female

