

COAXIAL ATTENUATORS CONDUCTION COOLED RPAX500




General Specifications

Housing: Nickel Plated Copper
Resistive Material: Thick Film
Connected: Passivated SMA Female
(Type N and TNC also available)
Impedance: 50 Ohm



Part Number	Attenuation (dB)	Attenuation Accuracy (dB)		VSWR (max)		Power (W)
		DC - 1.0 GHz	1.0 - 2.4 GHz	DC - 1.0 GHz	1.0 - 2.4 GHz	
RPAX500-XXXdB	0.5 - 3 3 - 10 10 - 40	±0.3 ±0.5 ±0.5	±0.75 ±1.0 ±1.5	1.10:1	1.25:1	500

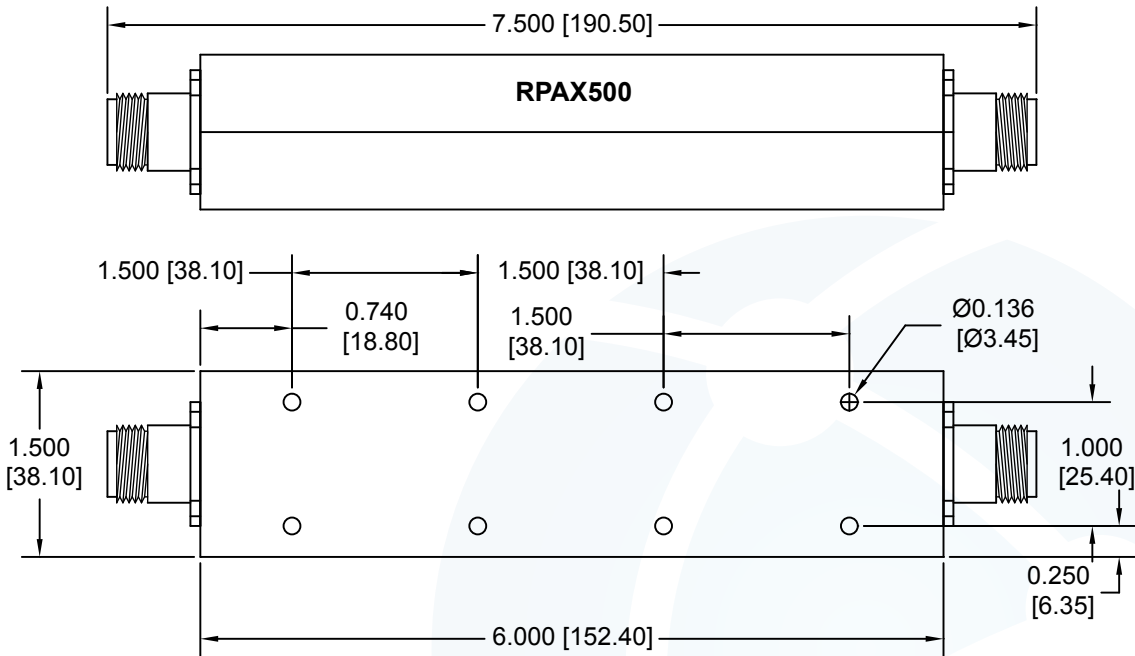

Dimensions are in inches [mm], Tolerance: .XXX = ±0.010, .XX = ±0.015

Ordering Information:

Example: **RPAX 500 -S MF dB**

Series ————— RPAX
Power Rating (W) ————— 500
Connector Type ————— -S
Gender ————— MF
dB Value ————— dB
(See Tables For Available Values)

S: SMA
N: N-Type
T: TNC
M: Male
F: Female

DERATING CURVE

