


## ZEROHM JUMPERS CONFORMAL COATED

### FEATURES:

- A. Current: 3 Amperes @ 25°C
- B. Resistance value: 10 milliohm (max.)
- C. Ambient temperature range: -55°C to + 125°C
- D. Insulation resistance: 10,000 megohms (min.)  
@ 100 Vds, 30 seconds
- E. Dielectric withstanding voltage: 500 Vrms, 60 Hz  
@ atmospheric pressure for 60 seconds
- F. Inductance: 10 nanohenrys (max.) @ 1Mhz

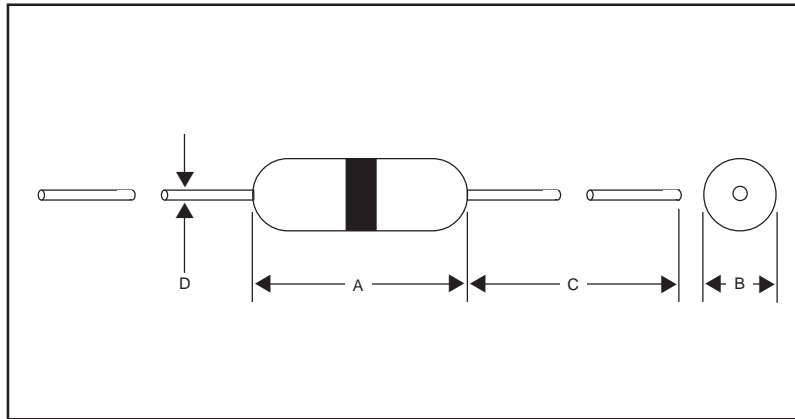

### DIMENSIONS: Inches & (mm)

TEPRO TYPE	BODY LENGTH A	BODY DIAMETER B	LEAD LENGTH C	LEAD DIAMETER D
TZ	.250 ±.015 (6.5 ±0.30)	.090 ±.008 (2.3 ±0.2)	1.50 ±.08 (28.0 ± 2.0)	.025 nom. (.063 nom.)

#### Packaging Note:

Unless otherwise specified on customer's purchase order, all units will be supplied taped and reeled per EIA Standards RS-296-D, Class 1.